



COLORECHART



eco-FICIENT[®]
Insulated Metal Panels

SIGNATURE® 300

Standard Stocked Colors
KYNAR 500® HYLAR 5000® Low Gloss

KYNAR POLAR WHITE
SR.70 SRI 85



ALMOND
SR.63 SRI 75



BROWNSTONE★
SR.47 SRI 54



REGAL GRAY
SR.55 SRI 64



SANDSTONE
SR.60 SRI 71



SIGNATURE® 300

Standard Non-Stocked Colors
KYNAR 500® HYLAR 5000® Low Gloss

Minimum quantities and/or extended lead times may be required. Please inquire.

SLATE GRAY★
SR.37 SRI 41



BRITE RED★
SR.49 SRI 56




HARBOR BLUE★
SR.28 SRI 27



PACIFIC BLUE★
SR.29 SRI 30



COLONIAL RED★
SR.34 SRI 36



SNOW WHITE★
SR.65 SRI 78



NATURAL PATINA★
SR.41 SRI 46



HUNTER GREEN★
SR.35 SRI 37



TUNDRA★
SR.46 SRI 52




SPRUCE★
SR.36 SRI 39



SMOKE GRAY
SR.50 SRI 57



TERRA COTTA
SR.38 SRI 41



CLASSIC GREEN★
SR.27 SRI 27



AEGEAN BLUE
SR.29 SRI 29



MEDIUM BRONZE★
SR.33 SRI 35




SIGNATURE® 300


Standard Non-Stocked Metallic Colors
KYNAR 500® HYLAR 5000® Low Gloss

NOTE: Metallic coatings are directional. Panels and trim must be installed oriented in the same direction to prevent perceived shade variances.


SILVER METALLIC★
 SR.52 SRI 58




COPPER METALLIC★
 SR.46 SRI 51




DARK GRAY METALLIC
 SR.35 SRI 36



WEATHERED ZINC
 SR.38 SRI 41



CHAMPAGNE
 SR.40 SRI 43



SIGNATURE® 200

Standard Stocked Colors
SILICONIZED POLYESTER STANDARD GLOSS

*Igloo White is a Straight Polyester.

WINTER WHITE
 SR.59 SRI 69



ASH GRAY★
 SR.47 SRI 55



IGLOO WHITE*
 SR.64 SRI 77



LIGHT STONE★
 SR.50 SRI 58



SIGNATURE® 200

Standard Non-Stocked Colors
SILICONIZED POLYESTER

**Polar White is a Straight Polyester.

Minimum quantities and/or extended lead times may be required. Please inquire.

SADDLE TAN★
 SR.48 SRI 55



HAWAIIAN BLUE★
 SR.32 SRI 33



FERN GREEN★
 SR.27 SRI 27



DESERT SAND★
 SR.42 SRI 48



CRIMSON RED★
 SR.33 SRI 36




POLAR WHITE**
 SR.58 SRI 69



RUSTIC RED★
 SR.36 SRI 39



BURNISHED SLATE★
 SR.28 SRI 29




SOLAR WHITE
 SR.74 SRI 91



CHARCOAL GRAY★
 SR.27 SRI 27



KOKO BROWN★
 SR.28 SRI 29



STANDARD INTERIOR COLOR

*Igloo White is a Straight Polyester.



IGLOO WHITE*

★ Final color selection should be made from actual color chips.

- ★ See product selection chart for gauge and color availability.
- ★ Heavier gauges, narrower widths and embossing minimize "oil canning."
- ★ A 25-year limited paint warranty is available for all colors upon written request. For locations outside the continental USA and Canada, please inquire.
- ★ Signature® is a registered trademark of NCI Group, Inc.; Kynar 500® is a registered trademark of Arkema, Inc.; Hylar 5000® is a registered trademark of Solvay Solexis.

★ ENERGY STAR®
 Qualified Color



Applied FINISHES

NOTE: These applied finishes are standard for StoneWall panel. They are also optional finishes for Grand V, Grand H, Royal, Summit, Vintage, Insulated 7.2 and Insulated R (wall only) panels.

Tuff-Cast™ Finished Precast Concrete Metal Series

Fine Aggregate

*Available in Richmond, VA and Las Vegas, NV only.

NOTE: These finishes require the exterior skin of the panel to be manufactured from coil with a matta matte finish of the same color as the applied finish.

Standard Stocked Standard Non-Stocked



Tuff Wall® Stucco-Like Metal Series

Coarse Aggregate

*Available in Richmond, VA only.

NOTE: These finishes require the exterior skin of the panel to be manufactured from coil with a matta matte finish of the same color as the applied finish.

Standard Stocked Standard Non-Stocked




Granite Rock

*Available in Jackson, MS only.

NOTE: These finishes require the exterior skin of the panel to be manufactured from a Saddle Tan coil.




GRANITE ROCK

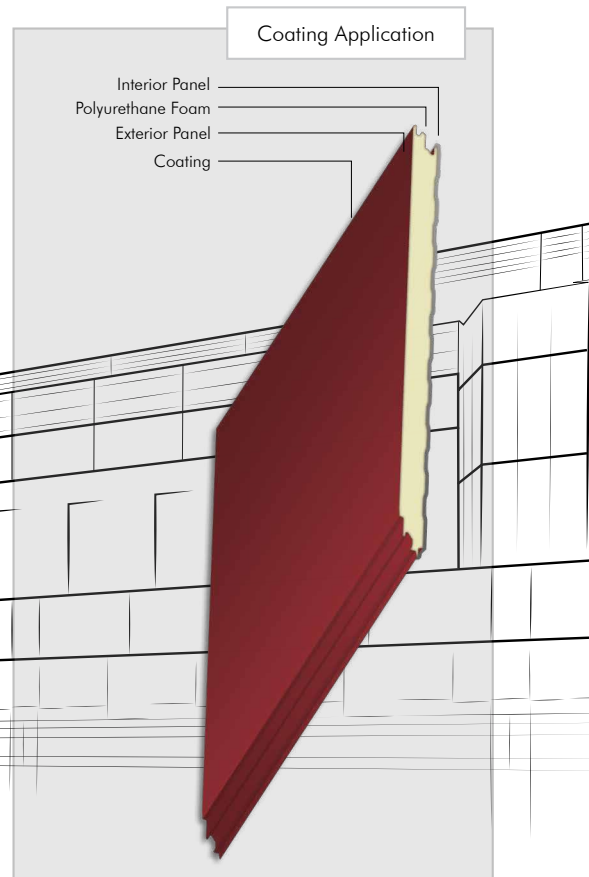

Product INFORMATION


Wall Panels

**SIGNATURE® 300, SIGNATURE® 200
AND APPLIED FINISHES**



eco-FICIENT® StoneWall Available in applied finishes only.

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 24'
- ▲ Available in applied finishes only.



eco-FICIENT® Vintage

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 40'




eco-FICIENT® Grand V

- ▲ Gauges
 - △ Exterior: 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 24", 30" and 36"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 32'
- ▲ Reveals: 1/8" (standard), 1/4", 1/2", 3/4", 1", 1 1/2", 2", 2 1/2" and 3"




eco-FICIENT® Royal

- ▲ Gauges
 - △ Exterior: 26, 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'




eco-FICIENT® Grand H

- ▲ Gauges
 - △ Exterior: 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 24", 30" and 36"
- ▲ Thicknesses: 2", 2 1/2" and 3"
- ▲ Length: Recommended maximum is 24'
- ▲ Reveals: 1/8" (standard), 1/4", 1/2", 3/4", 1", 1 1/2", 2", 2 1/2" and 3"



eco-FICIENT® Summit

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 36" and 42"
- ▲ Thicknesses: 2", 2 1/2", 3" and 4"
- ▲ Length: Recommended maximum is 40'




eco-FICIENT® Insulated 7.2 Panel

- ▲ Gauges
 - △ Exterior: 26, 24
 - △ Interiors: 26, 24
- ▲ Widths: 36"
- ▲ Thicknesses: 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 36'

Wall Panels

SIGNATURE® 300 & SIGNATURE® 200



eco-FICIENT® Insulated Fire Resistant Panel

- ▲ Gauges
 - △ Exterior: 26 and 24
 - △ Interiors: 26 and 24
- ▲ Widths: 42"
- ▲ Thicknesses: 4", 5", 6", 7" and 8"
- ▲ Length: Recommended maximum is 40'



eco-FICIENT® Classic®

- ▲ Gauges
 - △ Exterior: 26, 24 and 22
 - △ Interior: 26, 24 and 22
- ▲ Width: 42"
- ▲ Thicknesses: 2", 2 1/2", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'

Roof Panels

SIGNATURE® 300 & SIGNATURE® 200




eco-FICIENT®

Insulated BattenLok®

- ▲ Gauges
 - △ Exterior: 24 and 22
 - △ Interiors: 26, 24 and 22
- ▲ Widths: 30", 36" and 42"
- ▲ Thicknesses: 2", 2 ½", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'

Roof & Wall Panels

SIGNATURE® 300 & SIGNATURE® 200
AND APPLIED FINISHES*



eco-FICIENT®

Insulated R Panel

- ▲ Gauges:
 - △ Exterior: 26, 24 and 22
 - △ Interior: 26, 24 and 22
 - ▲ Widths: 36"
 - ▲ Thicknesses: 1 ½", 2", 2 ½", 3", 4", 5" and 6"
 - ▲ Length: Recommended maximum is 50'
 - ▲ Available for both roof & wall applications
- *Available in applied finishes in wall panels only.

Interior Panel

IGLOO WHITE




eco-FICIENT®

Interior Partition & Ceiling Panel

- ▲ Gauges: 26 (Both Surfaces)
- ▲ Width: 44 ½"
- ▲ Thicknesses: 2", 2 ½", 3", 4", 5" and 6"
- ▲ Length: Recommended maximum is 50'
- ▲ Standard Coating: Igloo White

Barrier Panel

HPCI WHITE



eco-FICIENT®

HPCI Barrier™ Panel

- ▲ Exterior & Interior Facings:
 - △ Minimum .016" thick HPCI Galvanized Steel
- ▲ Widths: 42"
- ▲ Thicknesses: 2", 3" and 4"
- ▲ Length: Recommended maximum is 24'
- ▲ Available in HPCI White only.



Houston, TX 877-713-6224
Adel, GA 888-446-6224
Atlanta, GA 877-512-6224

Atwater, CA 800-829-9324
Dallas, TX 800-653-6224
Indianapolis, IN 800-735-6224

Lubbock, TX 800-758-6224
Memphis, TN 800-206-6224
Oklahoma City, OK 800-597-6224

Omaha, NE 800-458-6224
Phoenix, AZ 888-533-6224
Richmond, VA 800-729-6224

Rome, NY 800-559-6224
Salt Lake City, UT 800-874-2404
San Antonio, TX 800-598-6224

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, MBCI reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit our website at www.mbc.com. Application details are for illustration purposes only and may not be appropriate for all environmental conditions, building designs or panel profiles. Projects should be designed to conform to applicable building codes, regulations and accepted industry practices. If there is a conflict between this manual and project erection drawings, the erection drawings will take precedence.

www.ecoficientseries.com